

AmberAir Compact RIS

- Non-residential
- Counterflow
- R-COVERY by SALDA
- $Q_v \leq 1500 \text{ m}^3/\text{h}$
- Horizontal/Vertical



HRU with counterflow exchanger type AmberAir Compact RIS

Heat recovery unit with **counterflow heat exchanger** and with or without built-in electrical post-heating. The unit is available in different versions up to approx. $1.500 \text{ m}^3/\text{h}$ with horizontal or vertical connections, both in left or right version. The unit is tested EPBD according to NBN EN308.

AmberAir Compact RIS will be available from 01/01/2026 and is the successor to the current HRS range.

Brand

- R-COVERY by SALDA

Application

- Ventilation for both residential and non-residential applications
- For indoor mounting in a frost protected area
- Outside mounting only possible for horizontal versions if equipped with a roof

Composition

- Housing in prelacquered steel plate RAL7040
- 50mm rock wool insulation, fire class A1
- Round duct connections
- Panel filters M5 - ISO 16890 ePM10 55% / F7 - ISO 16890 ePM1 65% (exhaust/supply)
- Filter detection with pressure switch
- Condensation tray with drain
- Automatic bypass (100%)
- With or without built-in electrical post-heater (duct battery available as an option)
- Modbus communication included as standard
- Possibility of regulation by CO_2 (sensor not included)
- The remote control is not included
- **MCB Light** regulation

Fan

- Directly driven EC direct current fan with backward inclined blades
- Regulation 20-100%

Exchanger


- High efficiency counterflow heat exchanger in aluminium

Filter

- The **AmberAir Compact RIS** unit is equipped with two filters
- Panel filters M5 - ISO 16890 ePM10 55% / F7 - ISO 16890 ePM1 65% (exhaust/supply)

Versions

AMBERAIR COMPACT RIS 1200 HEL MCB

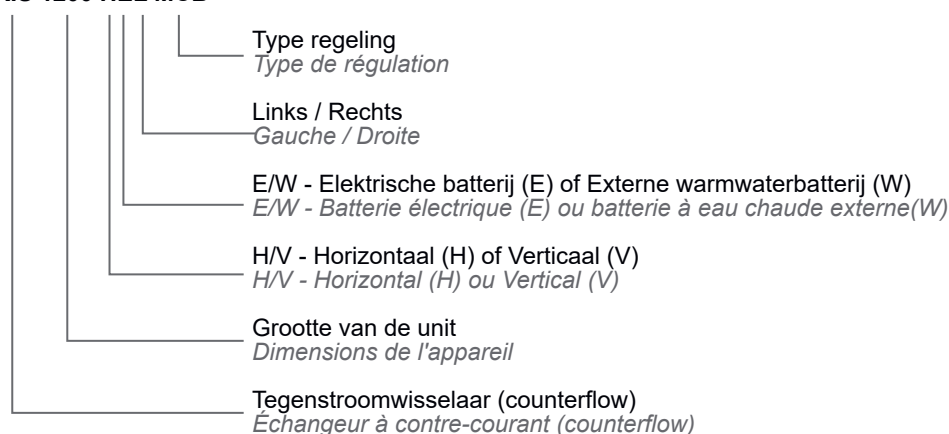

Certification

- Tested according to NBN EN 308: www.epbd.be
- Tested according to EUROVENT classifications according to EN 13053
 - Mechanical strength: D1
 - Airtightness class: L3/L2 (+700Pa/-400Pa)
 - Thermal transfer class: T3
 - Thermal bridge factor: TB3
 - Filter leakage: F9

Accessories

- Touchscreen controller, type **TS-AIR**
- Airtight control valve, type **AKH**
- Air outlet, type **UT**
- Connection piece, type **MTS**
- Roof for outside installation, type **RF-RIS**
- CO₂ sensor, type **DOX/E** or **WOX/E(-D)**
- Replacement filters, type **FS-RIS**

Order example

RIS 1900 HEL

Explanation

RIS = type of heat recovery unit

1900 = size

H = horizontal version

E = built-in electrical post-heating

L = left version