

- Condensate pump with remote float
- Eckerle



Maxi condensate pumps with float 32 l/h type EE1750M

Powerful condensate pump EE1750M with a separate 3-stage detection block. In addition to the on/off function, the EE1750M also offers a potential-free NO/NC alarm contact.

Included in the box:

- The condensate pump with vibration dampers
- A detection block
- 2x double sided padded tape
- A PVC vent hose
- A silicon hose (Ø15 mm, length 40mm) connected to the condensate drain hose

Brand

- Eckerle

Application

- Split units up to 30 kW


Specifications

- Max. flow rate: 32 l/h
- Max. delivery height: 15 m
- Max. suction height: 3 m
- Alarm contact: 230 VAC, 8A - NO/NC

Mounting

- Directly on the drainage hose
- On the drainage of the condensate tray

Dimensions

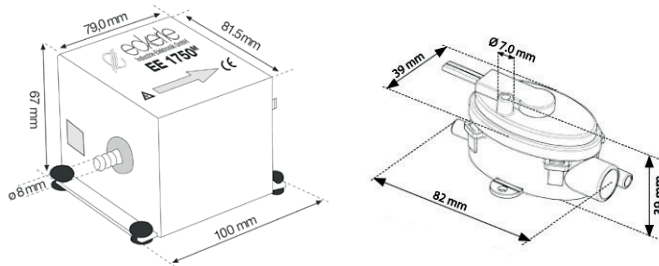

Dimensions

- Pump (L x W x H) : 100 x 81,5 x 67 mm
- Detection block (L x W x D): 82 x 39 x 39 mm

Accessoires

- Anti-return valve, type **ACC-CV**
- Condensate drain hose 6 mm, type **Kristal 6/9 (L= 50 m)**
- Connection piece 6mm (set of 10 pieces), type **ACC-CON6**
- Electrical extension cable 3 m, type **ACC-CBL3**
- Electrical extension cable 5m, type **ACC-CBL5**
- Replacement detection block, type **ACC-EE1750-FS**

Technical data

- Supply voltage: 230 V AC
- Thermal protection: 100°C



Technical drawing

