



Protectors type PAB

The protector (C1 Inhibitor 570912) protects the hydraulic installation from corrosion and deposits.

It ensures efficient operation of the installation and prevents frequent venting and cold spots in the installation. The protector can be applied to new and existing heating and cooling installations at high and low temperature. The protector is non-aggressive and is therefore suitable for all materials used in hydraulic installations.

Brand


Caleffi

Application

To protect new and existing installations from corrosion and deposits.

Specifications

- Bottle content: 500 ml liquid
- Colour: straw yellow
- Odour: light
- pH: 8,2
- Relative density: 1,1
- Solubility (in water): soluble in hot and cold water

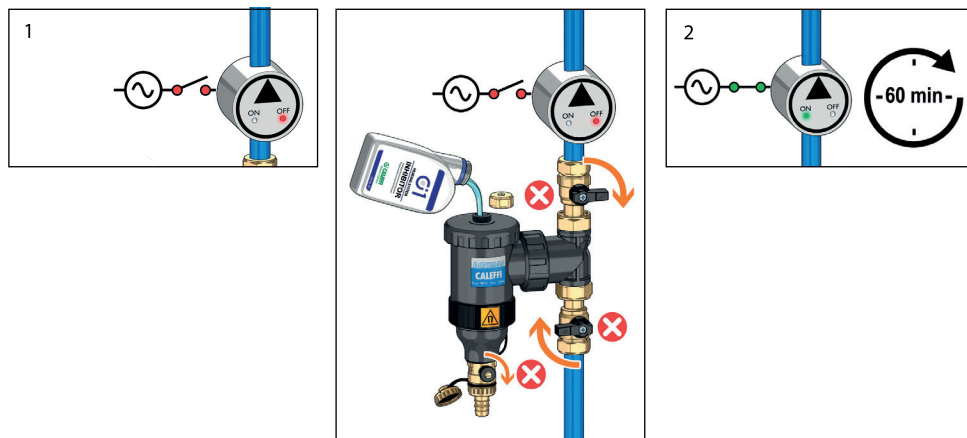

Notes

Protecting an existing or new installation:

Close the ball valves and drain the water from the dirt separator. Add PAB to the installation using a dirt separator. To do this, proceed as follows:

! Switch off the circulation pump!

1. Drain the water from the dirt separator to remove any sediment.
2. Let the water circulate according to the schedule in the 'dosage' section. For very dirty installations, the cleaning time must even be extended to 1 week.
3. Drain the dirt via the dirt separator until clean water is obtained. Dispose of the waste water in accordance with the applicable regulations
4. Fill in the label on the cap of the PAB and attach it to the heat pump.

The complete instructions can be found in the manual under "Downloads".