



Cleaners type CAB

The cleaner (C3 Cleaner 570911) dislodges sludge, scale deposits and dirt particles from hydraulic installations, after which the filter or dirt separator collects the dirt so that it can be eliminated. The cleaner can be applied to new and existing heating and cooling systems at high or low temperature. The cleaner is non-aggressive and therefore suitable for all materials used in hydraulic systems. In addition, the cleaner can be used with all types of propylene glycol.

Brand


Caleffi

Application

To remove sludge, scale, dirt particles and deposits from existing installations. For new installations, the cleaner enables commissioning to the required standards.

Specifications

- Bottle content: 500 ml liquid
- Colour: light brown
- Odour: light
- pH: 7-8
- Relative density: 1,15
- Solubility (in water): soluble in hot and cold water

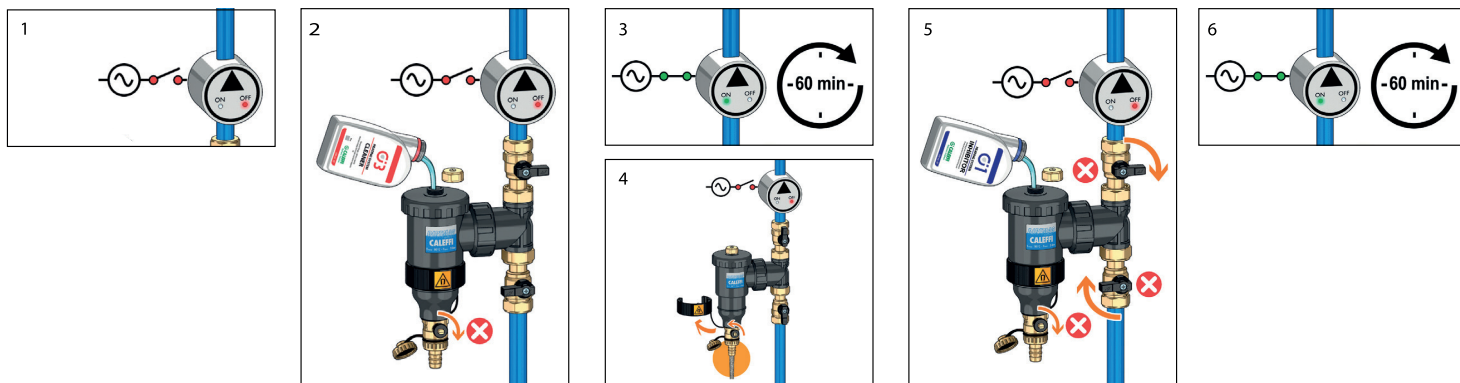

Notes

Flushing an existing or new installation:

Close the ball valves and drain the water from the dirt separator. Add CAB to the installation using a dirt separator. To do this, proceed as follows:

! Switch off the circulation pump!

1. Drain the water from the dirt separator to remove any sediment.
2. Let the water circulate according to the schedule in the 'dosage' section. For very dirty installations, the cleaning time must even be extended to 1 week.
3. Drain the dirt via the dirt separator until clean water is obtained. Dispose of the waste water in accordance with the applicable regulations.
4. Fill in the label on the cap of the CAB and attach it to the heat pump.

The complete instructions can be found in the manual under "Downloads".